


# 外壁用ステンレス製換気口〈フラットグリル〉

## KX-S 〈角ガラリ型 低圧損〉



### 材質

SUS304


### 仕上

シルバー焼付塗装

### フェイス着脱式

### 金網付型式

KX-SN 10M  
KX-SN 5M  
KX-SN 3M



### Dimensions

※指定色は日塗工の番号でご指定下さい。


Model	A	B	C	D	E	標準価格	金網加算	指定色加算
KX75S	72	154	20	55	10	¥4,600	¥1,000	¥1,500
KX100S	97	154	20	55	10	¥4,700	¥1,000	¥1,500
KX125S	122	204	20	55	10	¥6,600	¥1,400	¥1,900
KX150S	147	204	20	60	10	¥6,800	¥1,400	¥1,900

### 2 管路製品


Model	A	B	C	D	E	標準価格	金網加算	指定色加算
KXK125S-VP	122	204	20	55	10	¥6,800	¥1,400	¥1,900
KXK125S-VM	128	204	20	55	10	¥6,800	¥1,400	¥1,900

### 圧力損失特性

サイズ	圧力損失係数		有効開口面積 (cm <sup>2</sup> )
	排気	開口率	
100	0.67	122.2%	96
125	0.58	131.3%	161.3
150	0.9	105.4%	186.3



## KX-S 大口徑 〈角ガラリ型 低圧損〉



### 材質

SUS304


### 仕上

シルバー焼付塗装

### フェイス着脱式

### 金網付型式

KX-SN 10M  
KX-SN 5M  
KX-SN 3M



### Dimensions


※指定色は日塗工の番号でご指定下さい。

Model	A	B	C	D	標準価格	金網加算	指定色加算
KX175S	170	230	20	65	¥17,500	¥1,700	¥2,100
KX200S	197	250	20	80	¥17,800	¥1,900	¥2,400
KX225S	220	280	20	80	¥36,000	¥2,600	¥3,200
KX250S	245	300	20	80	¥37,000	¥2,600	¥3,400
KX300S	295	350	20	80	¥39,000	¥4,200	¥4,300

### 圧力損失特性

サイズ	圧力損失係数		有効開口面積 (cm <sup>2</sup> )
	排気	開口率	
175	2.39	64.7%	155.6
200	3.98	50.1%	157.3
225	1.32	87.0%	345.6
250	1.44	83.3%	409.1
300	1.93	72.0%	508.7

175 φ、200 φは上段のグラフでございます

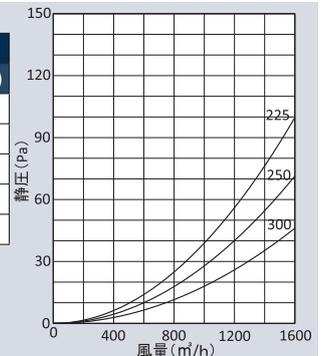

## KXD-SC (角ガラリ型 防火ダンパー付 低圧損)



### 材質

フェイス: SUS304  
FD: SUS304 1.5t



### 仕上

シルバー焼付塗装

### フェイス着脱式

### 温度フェーズ

標準 72°C  
オプション 120°C・180°C




### Dimensions

※指定色は日塗工の番号でご指定下さい。

Model	A	B	C	D	E	標準価格	金網加算	指定色加算
KXD75SC	72	154	20	55	10	¥7,400	¥1,000	¥1,500
KXD100SC	97	154	20	70	10	¥7,500	¥1,000	¥1,500
KXD125SC	122	204	20	86	10	¥10,400	¥1,400	¥1,900
KXD150SC	147	204	20	100	10	¥10,600	¥1,400	¥1,900

### 圧力損失特性

サイズ	圧力損失係数	流量係数	有効開口
	排気	開口率	面積 (cm <sup>2</sup> )
100	1.79	74.7%	58.7
125	1.2	91.3%	112
150	1.29	88.0%	155.3

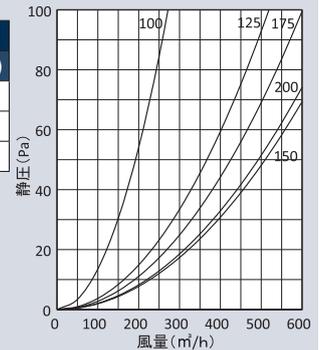

### 金網付型式

KXD-SCN 10M  
KXD-SCN 5M  
KXD-SCN 3M

## KXD-SC 大口徑 (角ガラリ型 防火ダンパー付 低圧損)



### 材質

フェイス: SUS304  
FD: SUS304 1.5t



### 仕上

シルバー焼付塗装

### フェイス着脱式

### 温度フェーズ

標準 72°C  
オプション 120°C・180°C



### Dimensions


※指定色は日塗工の番号でご指定下さい。

Model	A	B	C	D	標準価格	金網加算	指定色加算
KXD175SC	172	230	20	100	¥22,800	¥1,700	¥2,100
KXD200SC	197	250	20	120	¥23,000	¥1,900	¥2,400
KXD250SC	247	300	20	150	¥48,000	¥2,600	¥3,400

### 圧力損失特性

サイズ	圧力損失係数	流量係数	有効開口
	排気	開口率	面積 (cm <sup>2</sup> )
175	3.43	54.0%	129.7
200	4.36	47.9%	150.3
250	1.95	71.6%	351.8

175φ、200φは上段のグラフにございます

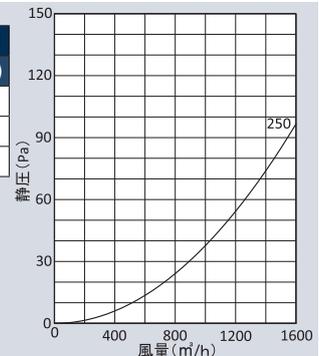

### 金網付型式

KXD-SCN 10M  
KXD-SCN 5M  
KXD-SCN 3M