

ST-ABL (厚型 縦ガラリ 低圧損)



材質

アルミニウム

仕上

アルマイト処理
Anodized

公団呼称

VAL

BL 認定番号

BLVU040510

Dimensions

※指定色は日塗工の番号でご指定下さい。

Model	A	B	C	D	標準価格	金網加算	指定色加算
ST75ABL	72	138	116	35	¥3,200	¥600	¥1,500
ST100ABL	97	165	141	35	¥3,300	¥700	¥1,800
ST125ABL	120	191	166	40	¥3,800	¥1,200	¥1,900
ST150ABL	145	214	190	60	¥4,700	¥1,700	¥2,100




2 管路製品

Model	A	B	C	D	標準価格	金網加算	指定色加算
STK125ABL-VP	122	191	166	40	¥4,100	¥1,200	¥1,900
STK125ABL-VM	128	191	166	40	¥4,100	¥1,200	¥1,900

金網付型式

ST-ANBL 10M
ST-ANBL 5M
ST-ANBL 3M

圧力損失特性

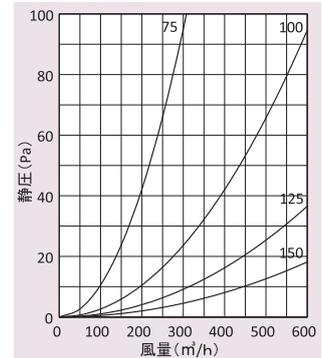

STD-ACBL (厚型 縦ガラリ 防火ダンパー付 低圧損)



材質

フェイス: アルミニウム
FD: SUS304 1.5t

仕上

アルマイト処理
Anodized

フェイス着脱式

温度フェース

標準 72°C
オプション 120°C

Dimensions

※指定色は日塗工の番号でご指定下さい。

Model	A	B	C	D	標準価格	金網加算	指定色加算
STD100ACBL	97	165	141	63	¥5,900	¥700	¥1,800
STD125ACBL	122	191	166	79	¥7,200	¥1,200	¥1,900
STD150ACBL	147	214	190	93	¥8,300	¥1,700	¥2,100

公団呼称

VALD

BL 認定番号

BLVU040510

金網付型式

STD-ACNBL 10M
STD-ACNBL 5M
STD-ACNBL 3M

圧力損失特性

